

PEERLUX[®]
SERIES

GP-15



PEERLESS[®]
electric-électrique

INCEP[®]TION[®]
PEERLESS CANADA

CONCEPT

The GP-15 is a **LED luminaire** for **surface** or **suspended** installation with field adjustable aircraft cables or v-links for mounting chain. A hinged and framed wireguard reinforced for added strength with a durable #12 clear prismatic acrylic lens. Rigid one-piece body constructed from code gauge steel. Ideal for gymnasiums, recreational areas and other commercial environments. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.




*LED Five (5) year limited warranty. ***Complies with Buy American Act.


**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

Specifications are subject to change. Please confirm latest specifications prior to placing order.

STRUCTURE

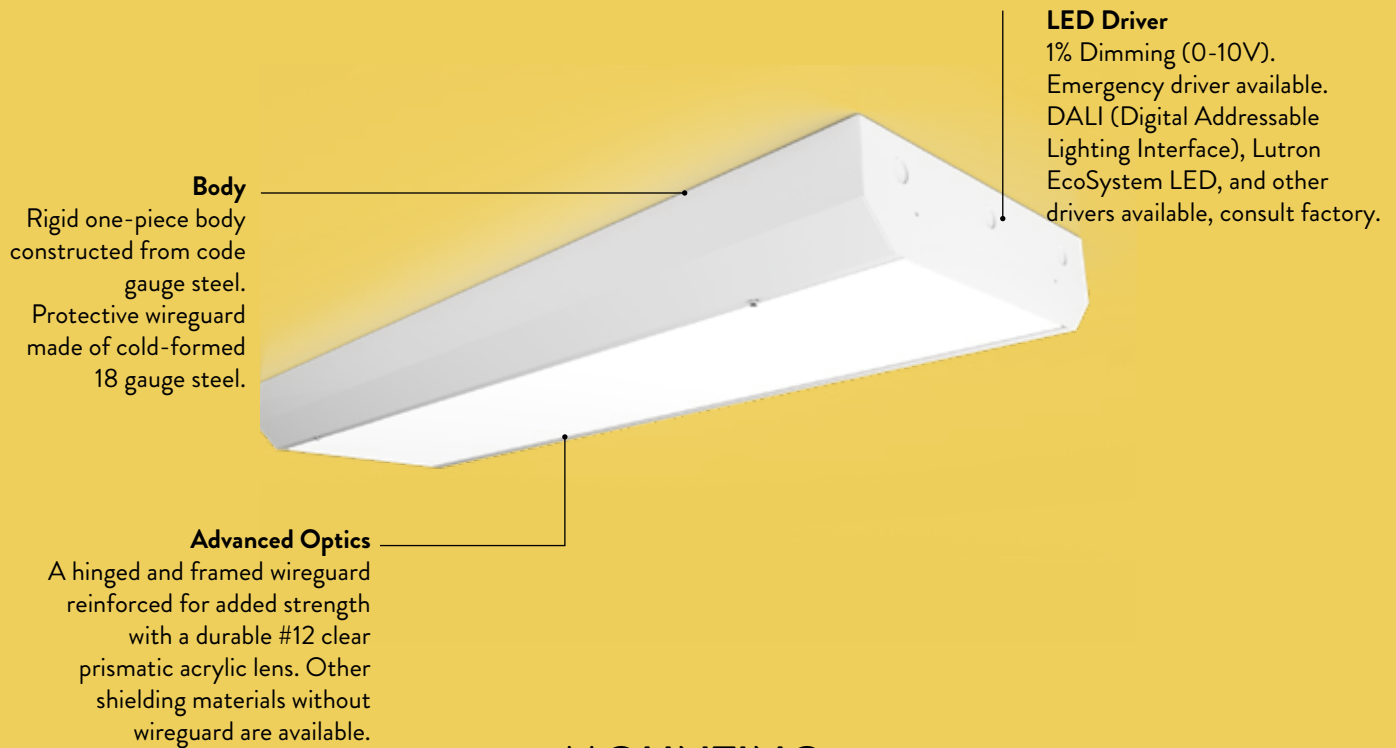

MOUNTING

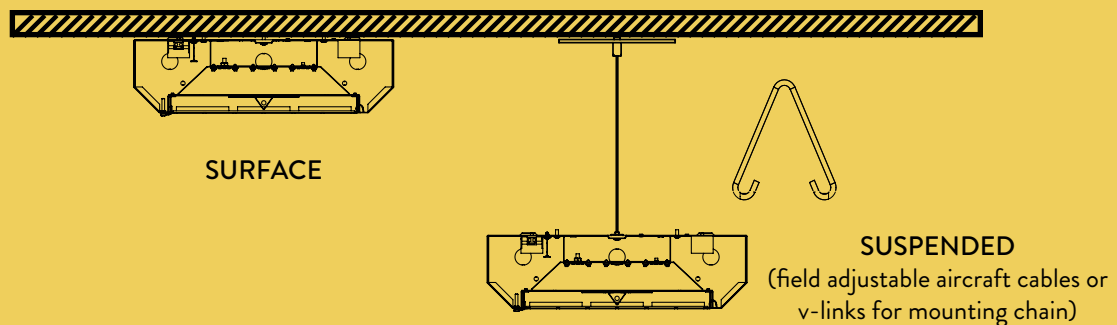




DESIGNED FOR GYMNASIUMS

Ideal for gymnasiums, recreational areas and other commercial environments. Row mounting available, consult factory.




PHOTOMETRIC DATA

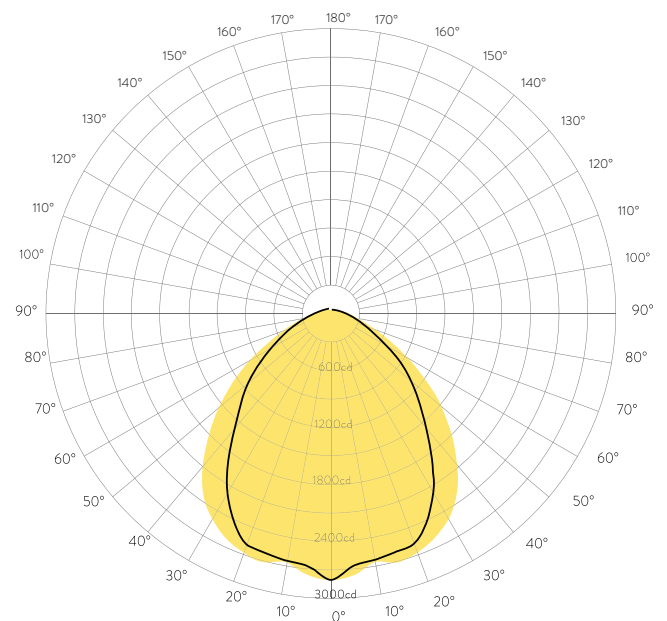

GP-15-4-60-35K

0°-180° —
90°-270° —

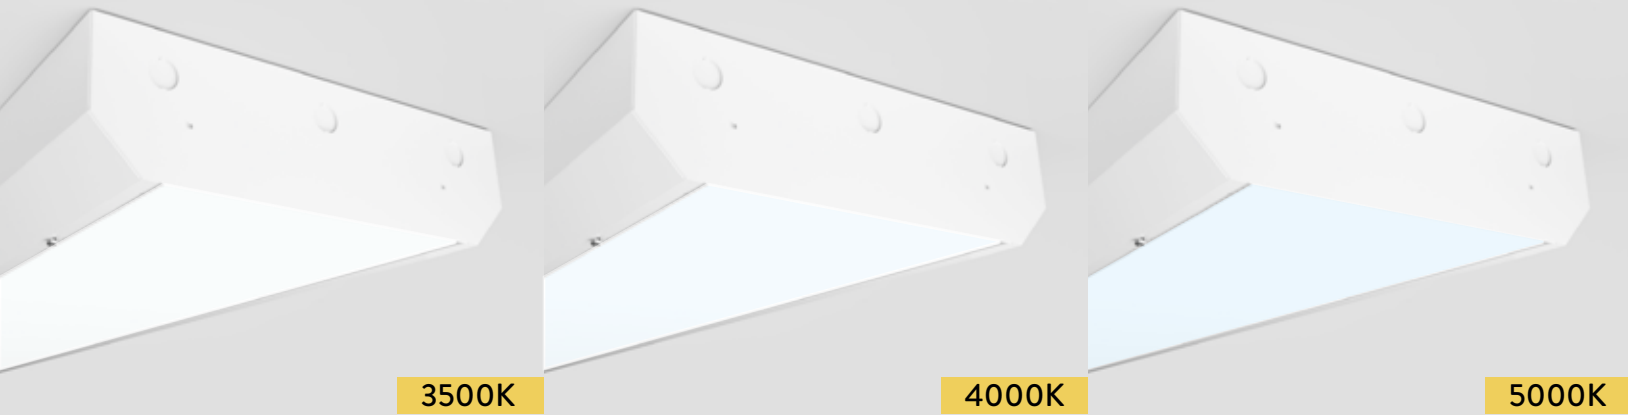

TUNABLE WHITE FUNCTION OPTIONS

Available in 3500K, 4000K and 5000K




COLOR

Standard finish is matte white polyester baked powder coat enamel. Matte grey and black available.




DIMENSIONS

SIZE	L	W	H	MTG L	MTG W
4FT	48.00"	14.90"	4.20"	35.75"	10.10"
8FT	95.90"	14.90"	4.20"	71.90"	10.10"

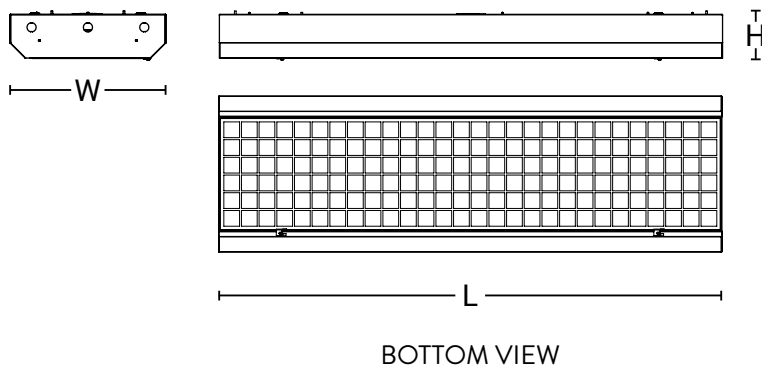

ORDERING INFORMATION

GP	15						
FIXTURE	WIDTH	LENGTH	LUMENS	CCT	*OPTION*	SHIELDING	DRIVER
GP = Gymnasium . Protective	15 = 15"	4 = 4ft	44 = 4400lm 60 = 6000lm	35K = 3500K 40K = 4000K 50K = 5000K TW = Tunable White	WG = Wireguard	12 = Clear Prismatic Acrylic 12F = Frosted Prismatic Acrylic 12P = Clear Prismatic Polycarbonate 0.125in THK 125 = Clear Prismatic Acrylic 0.125in THK PC = Clear Polycarbonate 0.125in THK	MV = Standard 120V-277V 1% Dimming (0-10V) 347 = Standard 347V Dimming (0-10V) EM = Emergency Driver X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		8 = 8ft	60 = 6000lm 88 = 8800lm 120 = 12000lm	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory			



OFFICE:

255-438 Isabey
St-Laurent, QC H4T 1V3
T: 514.595.1671
F: 514.595.4411

PRODUCTION:

2900 Loyalist Str.
Cornwall, ON K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com