

HTP



PEERLESS[®]
electric-électrique

INCEPTION[®]
PEERLESS CANADA

CONCEPT

The HTP is a **LED luminaire** for **suspended** installation with aircraft cables. The slim and modern design makes it seem nearly transparent when off. When on, with 55% down lighting and 45% up lighting distribution it gives an illusion of a floating fixture in mid-air.

PMMA shielding with an aluminum extrusion body. Ideal for indoor environments, such as offices, hospitals and schools. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**


Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.



Specifications are subject to change. Please confirm latest specifications prior to placing order.

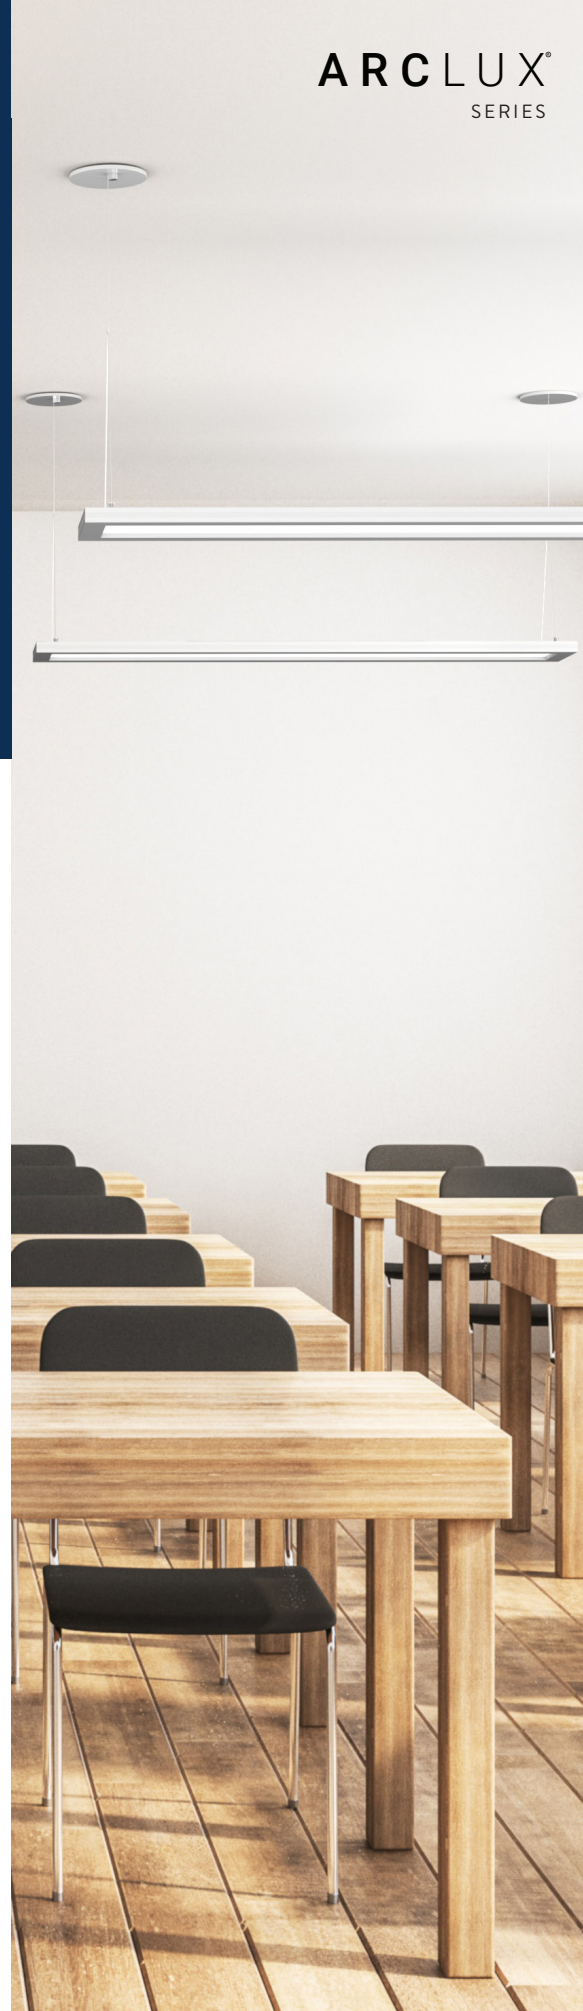

STRUCTURE





MOUNTING

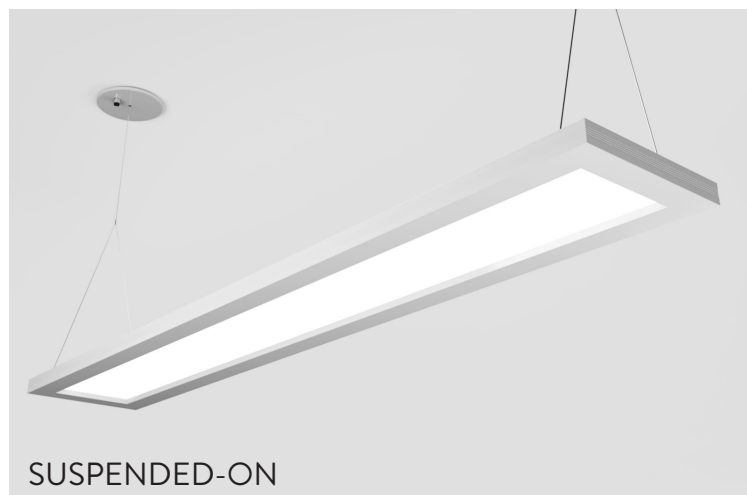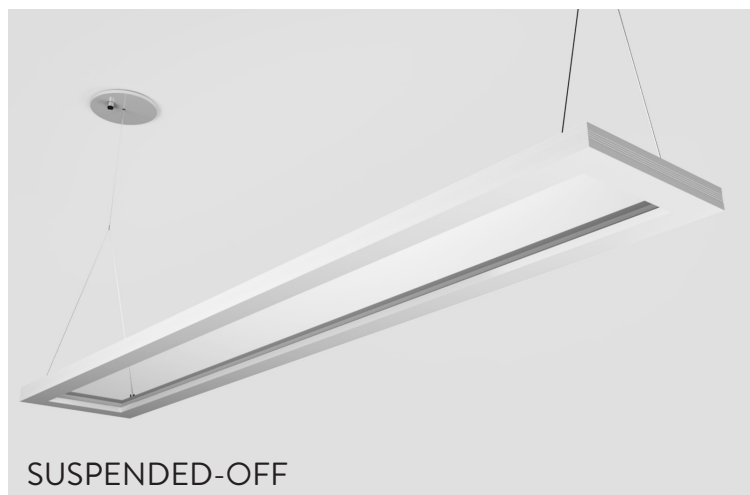




PHOTOMETRIC DATA

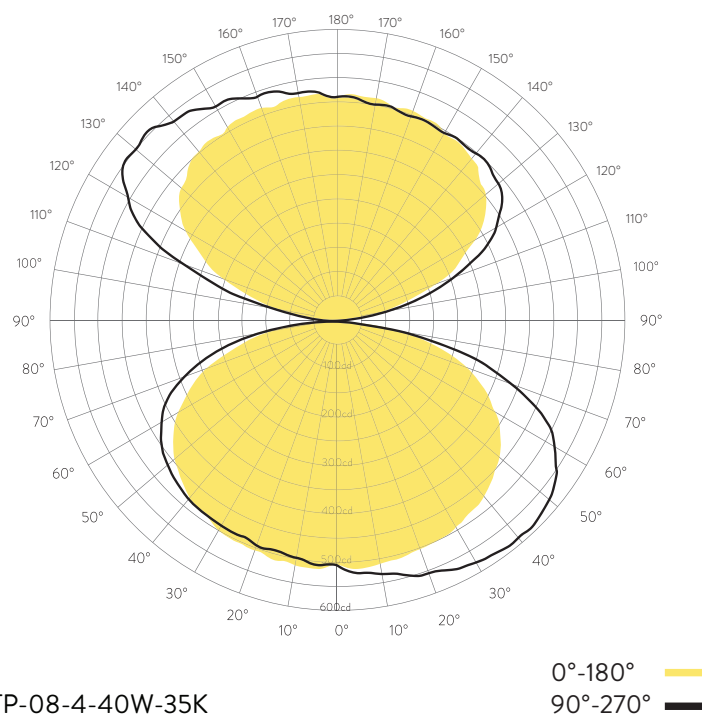


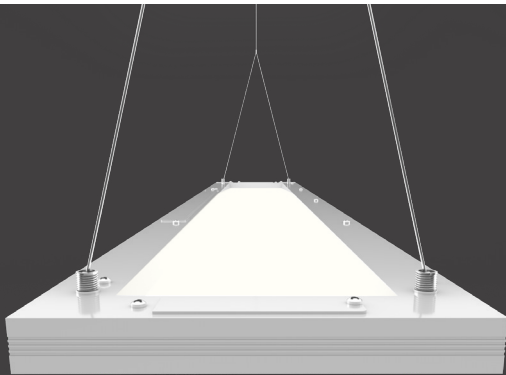

3000K

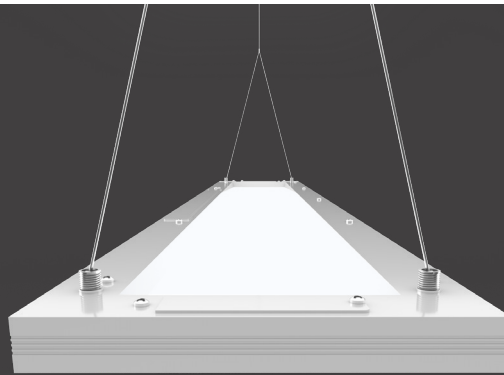

3500K

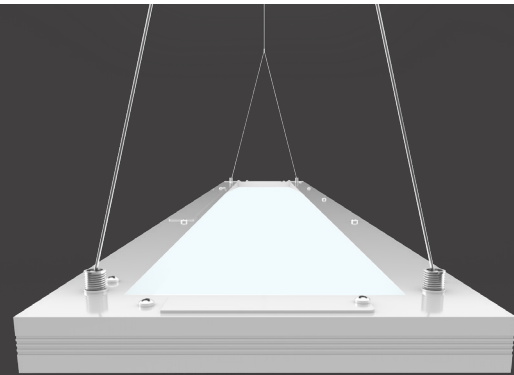

4000K

TUNABLE WHITE FUNCTION OPTIONS


Available in 3000K, 3500K and 4000K





DIMENSIONS

SIZE	L	W	H
4FT	47.25"	8.00"	1.00"
4FT	47.25"	12.00"	1.00"
8FT	94.50"	8.00"	1.00"

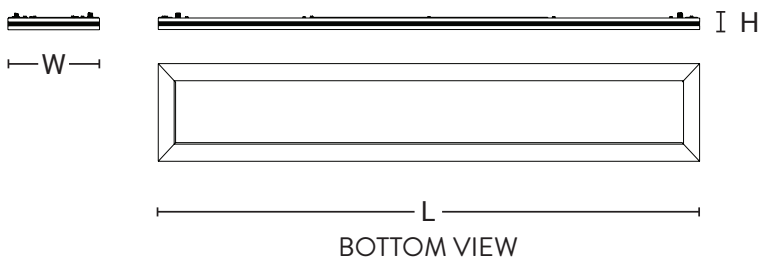

ORDERING INFORMATION

HTP							MV
FIXTURE	WIDTH	LENGTH	WATTAGE	CCT	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
HTP = Horizontal . Transparent . Plane	08 = 8"	4 = 4ft	40W = 40 Watts	30K = 3000K 35K = 3500K 40K = 4000K	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V, 10% Dimming (0-10V)
		8 = 8ft	80W = 80 Watts		A8 = 96in Aircraft Cable	C3 = 8ft Cord	
	12 = 12"	4 = 4ft	54W = 54 Watts		X = row mounting available, consult factory		



OFFICE:

255-438 Isabey
St-Laurent, QC H4T 1V3
T: 514.595.1671
F: 514.595.4411

PRODUCTION:

2900 Loyalist Str.
Cornwall, ON K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com