

## GENERAL DESCRIPTION

**LED luminaire** for **suspended** installation with aircraft cables. Features a minimalistic and clean design providing a superior quality of lighting. Snap-in flat frosted acrylic lens and extruded aluminum body. Ideal for commercial or architectural environments. Row mounting available, consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*  
Suitable for damp locations.



\*LED Five (5) year limited warranty.

\*\*Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

Specifications are subject to change. Please confirm latest specifications prior to placing order.



## ELECTRICAL

**3000K** **3500K** **4000K**

**120V - 277V** **347V**

\*TW (Tunable White), other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory.  
L80 performance at 60,000 hours minimum.  
80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available, consult factory.

## FINISH

Standard finish is high gloss white polyester baked powder coat enamel. Custom colours available, consult factory.  
Glossy / Matte / Custom Colours



## SHIELDING

Snap-in flat frosted acrylic lens.


## CONSTRUCTION

4.00" diameter extruded aluminum body.

## DIMENSIONS


SIZE	L	W	H
2FT	23.50"	4.00"	4.00"
4FT	46.20"	4.00"	4.00"
6FT	70.50"	4.00"	4.00"
8FT	92.20"	4.00"	4.00"

## MOUNTING / CROSS SECTION

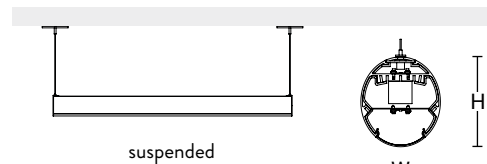


## ORDERING INFORMATION

RINA				FA						
FIXTURE	DISTRIBUTION	LENGTH	LUMENS	CCT	SHIELDING	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER	
<b>RINA =</b> Round . Indirect . Direct . Architectural	<b>5U5 =</b> 50% Up / 50% Down	<b>2 =</b> 2"	<b>50 =</b> 500lm/ft	<b>30K =</b> 3000K	<b>FA =</b> Snap-in Flat Frosted Acrylic	<b>GLOSSY</b> <b>W =</b> White Housing	<b>A4 =</b> 48in Aircraft Cable	<b>C1 =</b> 5ft Cord	<b>MV =</b> Standard 120V-277V, 1% Dimming (0-10V)	
	<b>6U4 =</b> 60% Up / 40% Down	<b>4 =</b> 4"	<b>80 =</b> 800lm/ft	<b>35K =</b> 3500K		<b>B =</b> Black Housing	<b>A5 =</b> 60in Aircraft Cable	<b>C2 =</b> 6ft Cord		
	<b>4U6 =</b> 40% Up / 60% Down	<b>6 =</b> 6"	<b>100 =</b> 1000lm/ft	<b>40K =</b> 4000K		<b>G =</b> Grey Housing	<b>A8 =</b> 96in Aircraft Cable	<b>C4 =</b> 9ft Cord	<b>EM =</b> Emergency Driver	
	<b>7U3 =</b> 70% Up / 30% Down	<b>8 =</b> 8"	<b>120 =</b> 1200lm/ft	<b>TW =</b> Tunable White		<b>MATTE</b> <b>WM =</b> White Housing	<b>A12 =</b> 144in Aircraft Cable	<b>C7 =</b> 13ft Cord	<b>X =</b> DALI, Lutron EcoSystem LED, and other drivers available, consult factory	
	<b>3U7 =</b> 30% Up / 70% Down		<b>150 =</b> 1500lm/ft *not applicable for direct light distribution	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory		<b>BM =</b> Black Housing	<b>X =</b> row mounting available, consult factory			
<b>DIR = 100% Down</b>					<b>GM =</b> Grey Housing					
<b>IND = 100% Up</b>					<b>X = other colours and finishes available, consult factory</b>					
*Custom distribution available, consult factory										
*Batwing available, consult factory										

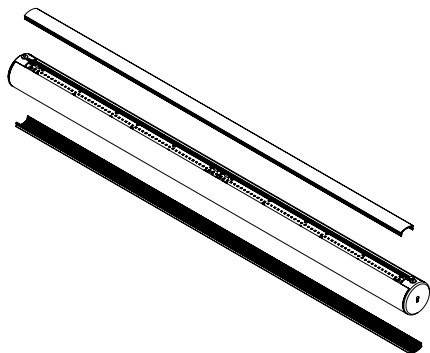

## DIMENSIONS

SIZE	L	W	H	MTG L
2FT	23.50"	4.00"	4.00"	22.38"
4FT	46.20"	4.00"	4.00"	45.38"
6FT	70.50"	4.00"	4.00"	69.38"
8FT	92.20"	4.00"	4.00"	91.38"

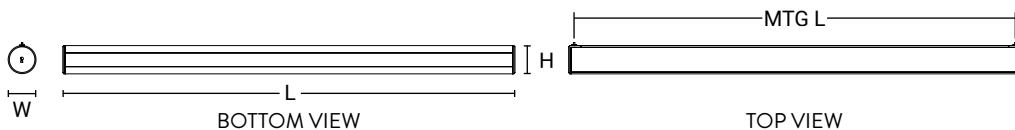

## SHIELDING

Snap-in flat frosted acrylic lens.

## CONSTRUCTION

4.00" diameter extruded aluminum body.

## FINISH

Standard finish is high gloss white polyester baked powder coat enamel. Custom colours available, consult factory.

Glossy / Matte / Custom Colours



## LED LIGHT ENGINE

Mounted on internal high reflectance white painted reflector.

## LED DRIVER

1% Dimming (0-10V). Emergency driver available.  
DALI (Digital Addressable Lighting Interface), Lutron EcoSystem LED, and other drivers available, consult factory.

## ELECTRICAL

3000K 3500K 4000K

120V - 277V 347V

\*TW (Tunable White), other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory.  
L80 performance at 60,000 hours minimum.  
80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available, consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*  
Suitable for damp locations.




\*LED Five (5) year limited warranty.


\*\*Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

## MOUNTING / CROSS SECTION

Suspended installation with aircraft cables.

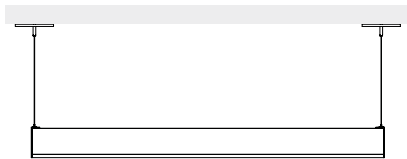

SUSPENDED



CROSS SECTION