

LDXR

CONCEPT

The LDXR is a LED luminaire for recessed installation. Custom configurations, corners and patterns available, consult factory. Features a minimalistic and clean design providing a superior quality of lighting. Snap-in flat frosted acrylic lens and extruded aluminum body. Ideal for commercial or architectural environments. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

STRUCTURE



LED Driver


1% Dimming (0-10V).
Emergency driver available.
DALI (Digital Addressable
Lighting Interface), Lutron
EcoSystem LED, and other
drivers available, consult
factory.

Body
Extruded aluminum body.


Advanced Optics

Snap-in flat frosted
acrylic lens.


MOUNTING

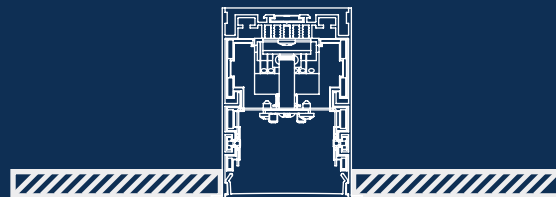


RECESSED

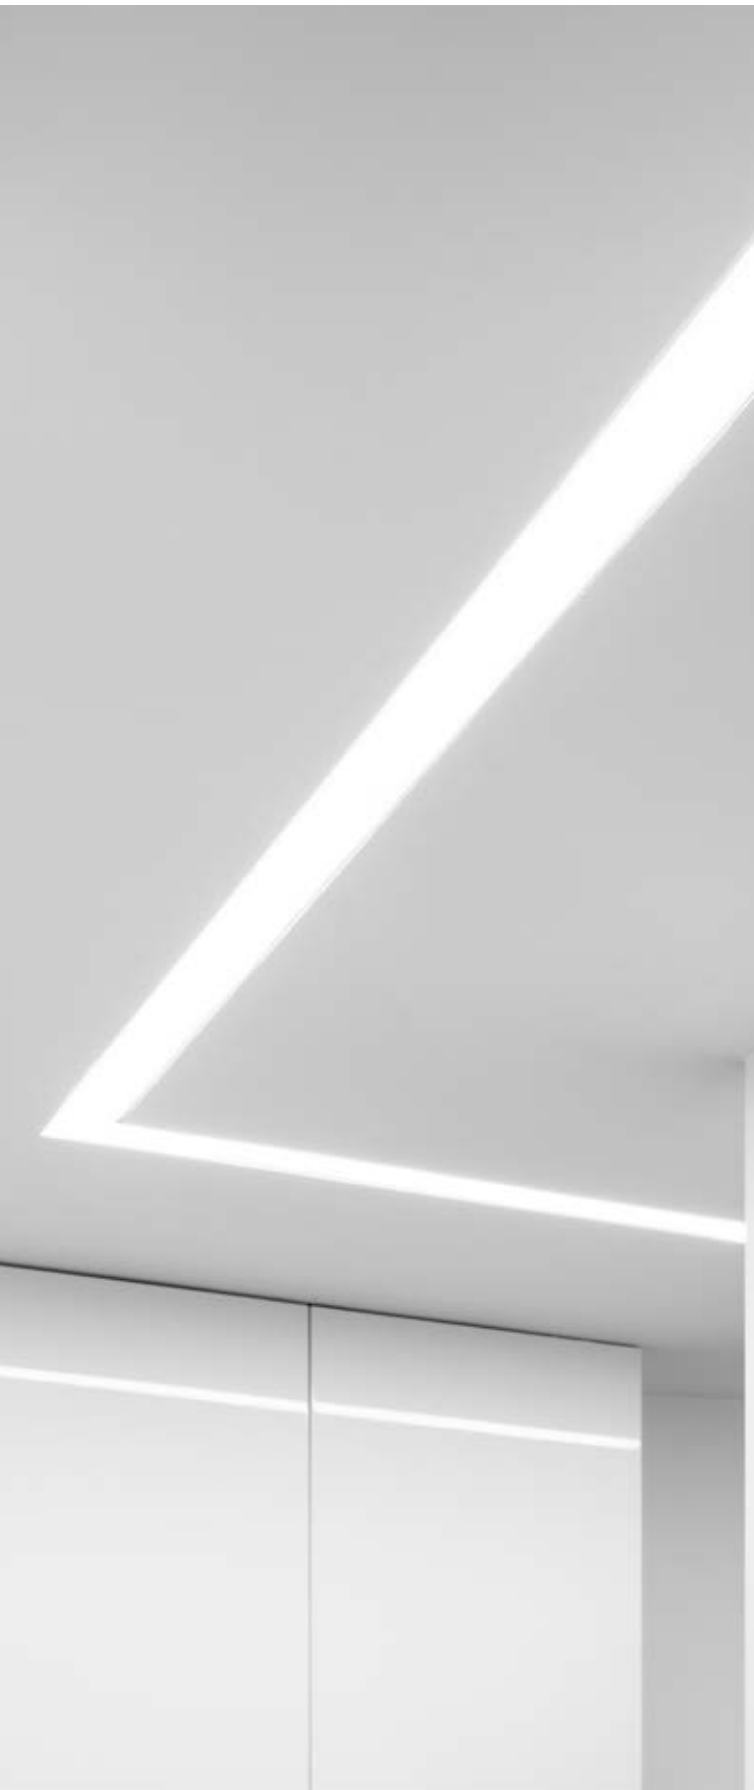

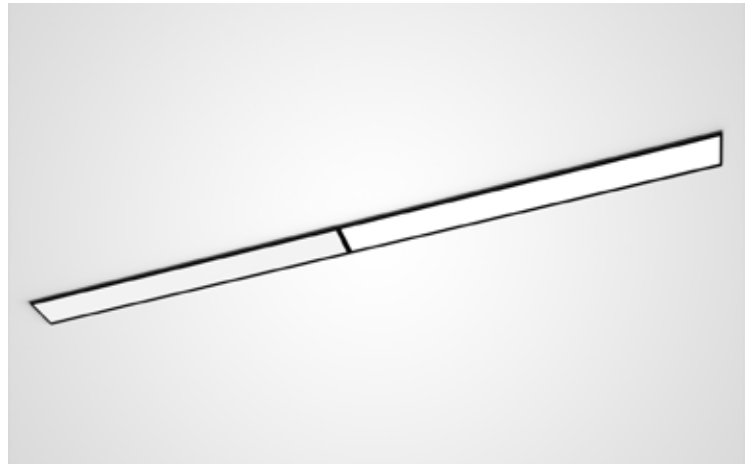

SEAMLESS CONTINUOUS RUNS CREATE A LINEAR LIGHTING ATMOSPHERE

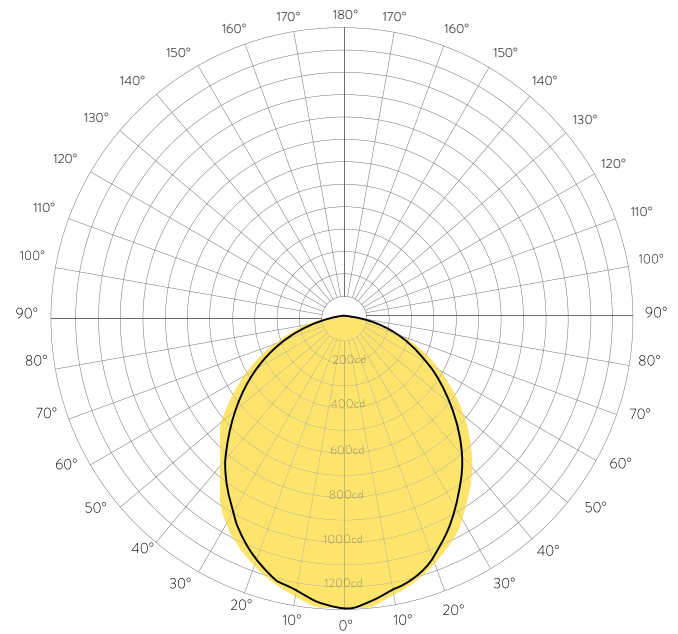

PHOTOMETRIC DATA



LDXR-60-8-80-35K

0°-180° 
90°-270° 



TUNABLE WHITE FUNCTION OPTIONS

Available in 3000K, 3500K, and 4000K





DIMENSIONS

SIZE LDXR-40	L	W	H
2FT	23.75"	1.55"	3.15"
4FT	47.75"	1.55"	3.15"
8FT	95.75"	1.55"	3.15"

SIZE LDXR-60	L	W	H
2FT	23.75"	2.35"	3.40"
4FT	47.75"	2.35"	3.40"
8FT	95.75"	2.35"	3.40"

SIZE LDXR-95	L	W	H
2FT	23.75"	3.75"	3.95"
4FT	47.75"	3.75"	3.95"
8FT	95.75"	3.75"	3.95"



BOTTOM VIEW

ORDERING INFORMATION

LDXR	FA						
FIXTURE	WIDTH	LENGTH	MOUNTING	LUMENS	CCT	SHIELDING	DRIVER
LDXR = Linear . Direct . Recessed	40 = 40mm (1.57")	2 = 2ft	T = Trim t-bar 15/16"	80 = 800lm/ft	30K = 3000K	FA = Flat Frosted Acrylic (Snap-in)	MV = Standard 120V-277V, 1% Dimming (0-10V)
	60 = 60mm (2.36")	4 = 4ft	TD = Trim Drywall	100 = 1000lm/ft	35K = 3500K		347 = Standard 347V Dimming (0-10V)
	95 = 95mm (3.74")	8 = 8ft	TL = Trimless Drywall	120 = 1200lm/ft	40K = 4000K		EM = Emergency Driver
		X = row mounting available, consult factory	X = custom configurations, corners and patterns available, consult factory		TW = Tunable White		X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
					*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory		

