

RQ1-0X

CONCEPT

The RQ1-0X is a LED luminaire for suspended installation with aircraft cables or surface installation. Provides a choice of direct or indirect light distribution allowing a superior quality of soft lighting. Frosted acrylic lens down and prismatic lens up (if required) supplied as standard. with one-piece rigid body constructed from code gauge steel. Ideal for commercial or architectural environments. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.



STRUCTURE


Canopy
Unique Canopy works for all types of junction boxes.

LED Driver
1% Dimming (0-10V).
Emergency driver available.
DALI (Digital Addressable Lighting Interface), Lutron EcoSystem LED, and other drivers available, consult factory.

Advanced Optics
Frosted acrylic lens down and prismatic lens up (if required) supplied as standard.

Body
One-piece rigid body constructed from code gauge steel.


MOUNTING

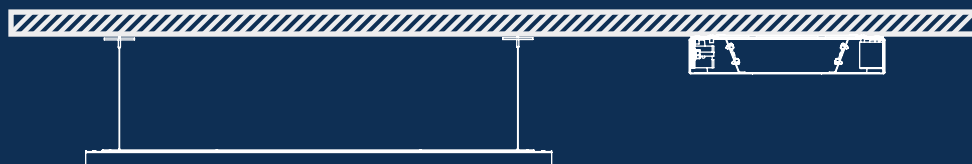

SUSPENDED / SURFACE



SURFACE

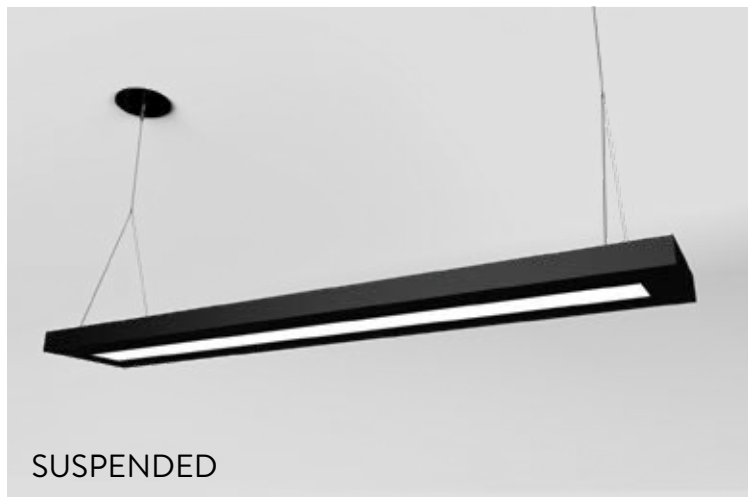


SUSPENDED



SEAMLESS CONTINUOUS RUNS




PHOTOMETRIC DATA

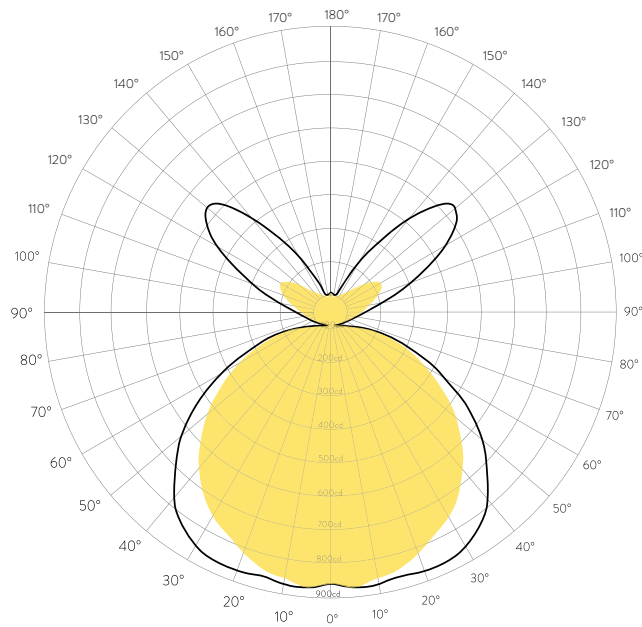

RQ1-04-4-3U7-48-40K

0°-180° 
90°-270° 

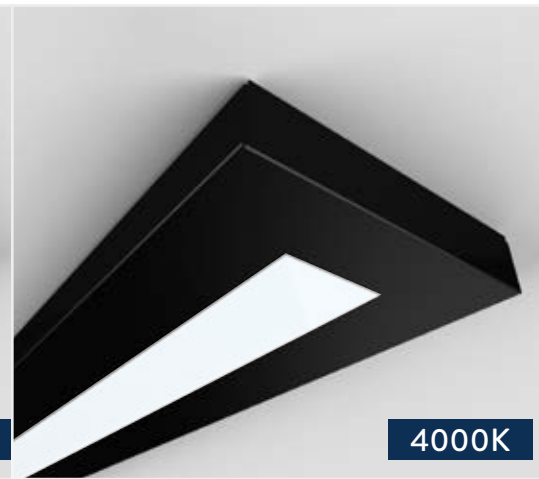

TUNABLE WHITE FUNCTION OPTIONS

Available in 3000K, 3500K and 4000K




CUSTOM COLORS



DIMENSIONS

SIZE	L	W	H
4FT	44.00"	8.50"	1.65"
8FT	92.25"	8.50"	1.65"

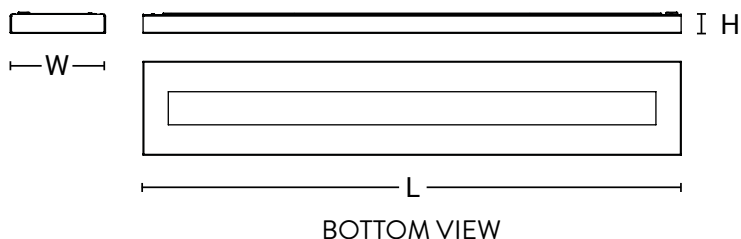

ORDERING INFORMATION

RQ1									
FIXTURE	OPENING	DISTRIBUTION	LENGTH	LUMENS	CCT	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
RQ1 = RQ .1 opening	02 = 2"	5U5 = 50% Up / 50% Down	4 = 4ft	32 = 3200lm	30K = 3000K	GLOSSY W = White Housing	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V)
	03 = 3"	6U4 = 60% Up / 40% Down		40 = 4000lm	35K = 3500K	B = Black Housing	A5 = 60in Aircraft Cable	C2 = 6ft Cord	347 = Standard 347V Dimming (0-10V)
	04 = 4"	4U6 = 40% Up / 60% Down	8 = 8ft	60 = 6000lm	40K = 4000K	G = Grey Housing	A8 = 96in Aircraft Cable	C4 = 9ft Cord	EM = Emergency Driver
		7U3 = 70% Up / 30% Down		64 = 6400lm	TW = Tunable White	MATTE WM = White Housing	A12 = 144in Aircraft Cable	C7 = 13ft Cord	X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		3U7 = 30% Up / 70% Down		80 = 8000lm	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory	BM = Black Housing			
		DIR = 100% Down		96 = 9600lm		GM = Grey Housing			
		IND = 100% Up		120 = 120000lm		X = other colours and finishes available, consult factory		X = row mounting available, consult factory	
		*Custom distribution available, consult factory							

