

EVALUX[®]
SERIES

SDLG-3-1ACF

 **PEERLESS**
electric-électrique

INCE|TION[®]
PEERLESS CANADA

CONCEPT

The SDLG-3-1ACF is a LED luminaire for recessed installation for 15/16" T-grid ceilings. Frosted acrylic lens with a rigid one-piece body constructed from code gauge steel with contoured steel reflector. Ideal for indoor general area lighting, retail space and other commercial lighting. Control available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**


Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.


***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.

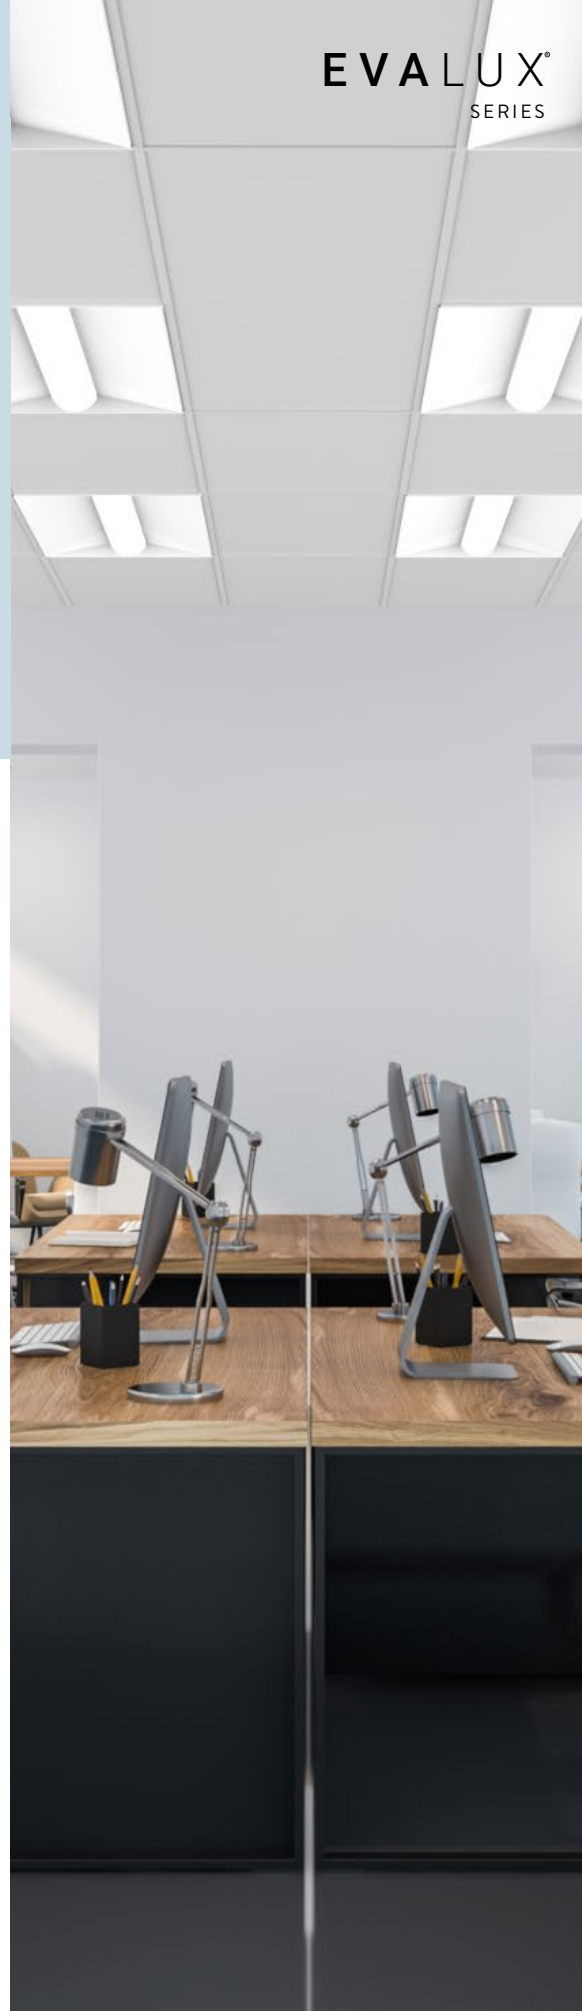

STRUCTURE

LED Driver
10% Dimming (0-10V).

Advanced Opticcs
Frosted acrylic lens.

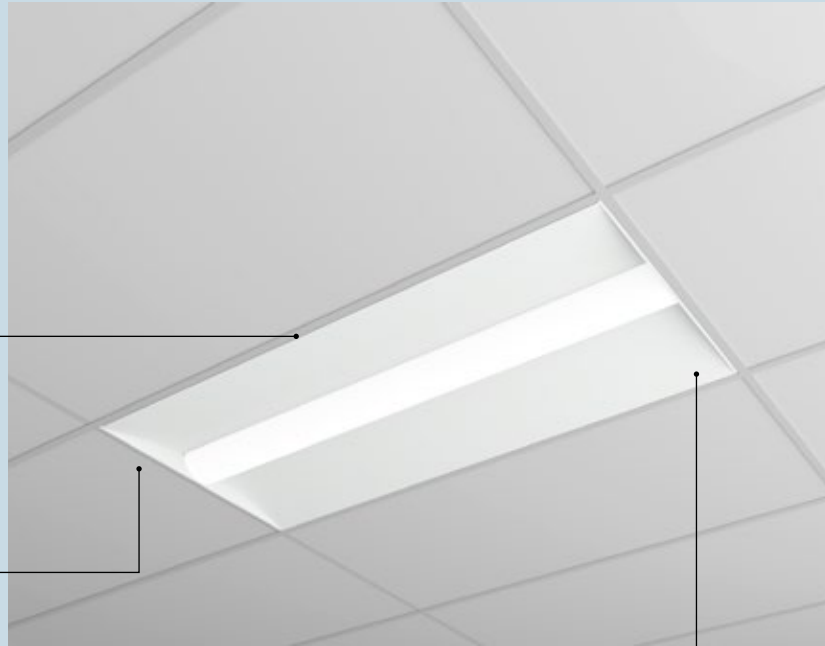

Body
Rigid one-piece body
constructed from code gauge
steel with contoured steel
reflector.

MOUNTING




RECESSED





PHOTOMETRIC DATA

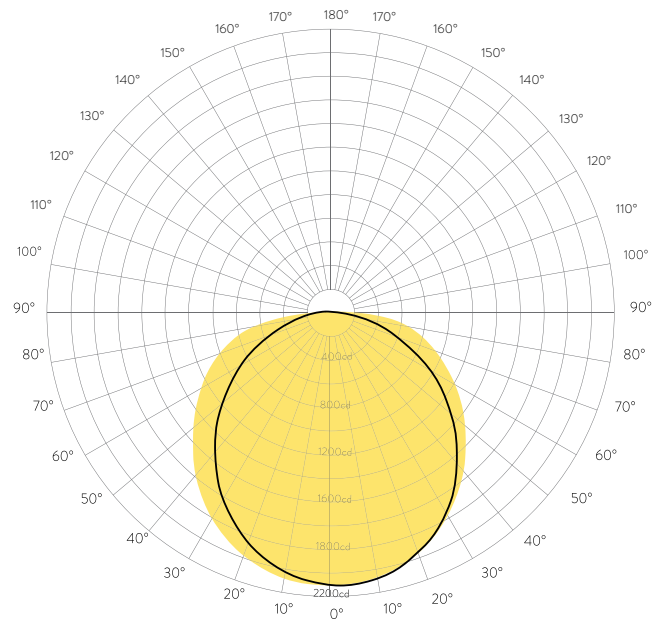


SDLG-3-1ACF-24G-45W-40K

0°-180° █
 90°-270° █



DIMENSIONS

SIZE	L	W	H
14G	47.70"	12.00"	4.00"
22G	23.75"	23.75"	2.35"
24G	47.70"	23.75"	2.35"

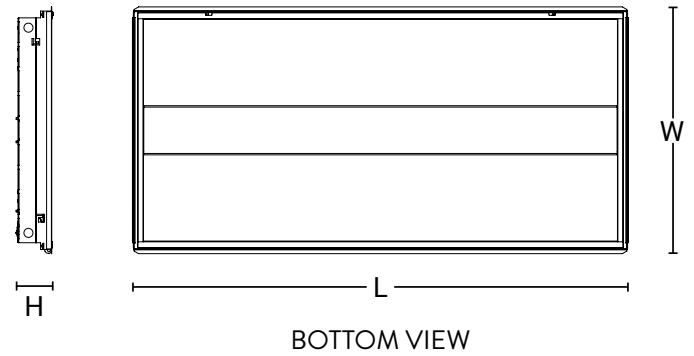

ORDERING INFORMATION

SDLG-3	1ACF				MV3
FIXTURE	SHIELDING	SIZE	WATTAGE	CCT	DRIVER
SDLG-3 = SDL . G . 3	1ACF = 1 Acrylic Frosted Lens	14G = 1' x 4' T-Bar Ceiling	36W = 36 Watts (SELECTABLE 24W, 30W, 36W)	30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K	MV3 = Standard 120V-347V, 10% Dimming (0-10V)
		22G = 2' x 2' T-Bar Ceiling			
		24G = 2' x 4' T-Bar Ceiling	45W = 45 Watts (SELECTABLE 35W, 40W, 45W)		

