



# SVT

# CONCEPT

The SVT is a LED luminaire for suspended installation with aircraft cables or surface installation with mounting clips. Provides a superior quality of soft lighting as well as delivers a consistent light intensity that decelerates food discoloration. Frosted ribbed polycarbonate lens with one piece body construction with anti-UV and V2 fireproof PC material. Ideal for supermarkets and commercial environments.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*

IP65. Suitable for wet locations.



\*LED Five (5) year limited warranty.

\*\*Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

\*\*\*Not all available products are DLC qualified. View DLC Qualified Products List at [designlights.org](http://designlights.org) to confirm which versions are qualified.



STRUCTURE


**Canopy**  
Unique Canopy works for all types of junction boxes.

**LED Driver**  
1% Dimming (0-10V).  
Emergency driver available.  
DALI (Digital Addressable Lighting Interface), Lutron EcoSystem LED, and other drivers available, consult factory.


**Advanced Optics**  
Frosted ribbed polycarbonate.

**Body**  
One piece body construction with anti-UV and V2 fireproof PC material.

MOUNTING

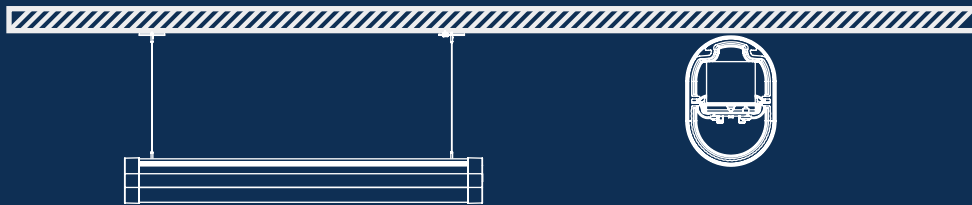

SUSPENDED / SURFACE

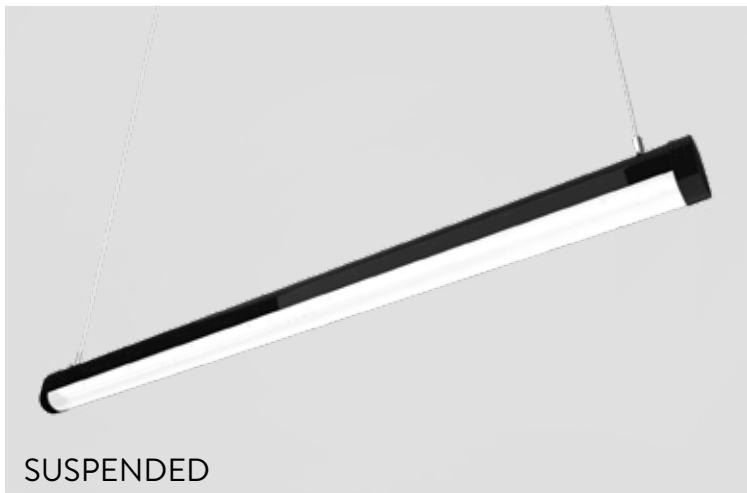


SUSPENDED



SURFACE



## PHOTOMETRIC DATA

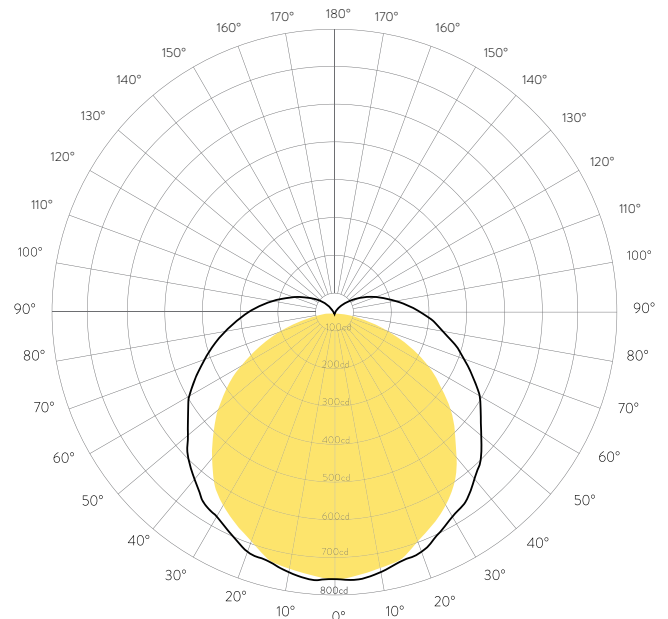

SVT-4-30-40K

0°-180° █  
90°-270° █



## TUNABLE WHITE FUNCTION OPTIONS

Available in 3000K, 3500K and 4000K




## CUSTOM COLORS



## DIMENSIONS

SIZE	L	W	H
2FT	24.00"	2.15"	3.10"
4FT	47.00"	2.15"	3.10"
6FT	69.00"	2.15"	3.10"
8FT	92.00"	2.15"	3.10"

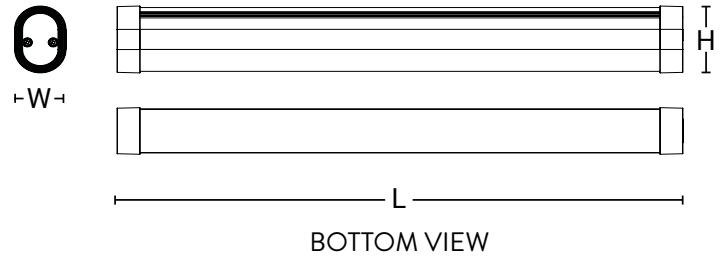

## ORDERING INFORMATION

SVT				P2				
FIXTURE	LENGTH	LUMENS	CCT	SHIELDING	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
<b>SVT =</b> Slim . Vapor . Tight	2 = 2ft	15 = 1500lm 30 = 3000lm	30K = 3000K 35K = 3500K 40K = 4000K TW = Tunable White *Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory	<b>P2 =</b> Frosted Ribbed Polycarbonate	<b>GLOSSY</b>  W = White Housing  B = Black Housing	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V)  347 = Standard 347V Dimming (0-10V)  EM = Emergency Driver  X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
	4 = 4ft	30 = 3000lm 60 = 6000lm	A5 = 60in Aircraft Cable			C2 = 6ft Cord		
	6 = 6ft	45 = 4500lm 90 = 9000lm	A8 = 96in Aircraft Cable			C4 = 9ft Cord		
	8 = 8ft	60 = 6000lm 120 = 12000lm	A12 = 144in Aircraft Cable			C7 = 13ft Cord		
						SW = Side Wall Mounted, consult factory		

