

TB

CONCEPT

The TB is a LED luminaire for recessed installation, replaces a 9/16” or 15/16” t-bar. The integrated design allows to create seamless continuous or discontinuous linear lighting arrangements that perfectly blend with the ceiling, consult factory. Snap-in frosted acrylic lens and aluminum extrusion t-grid bracket. Ideal for architecture and commercial environments.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.



STRUCTURE

LED Driver

1% Dimming (0-10V).
Emergency driver available.
DALI (Digital Addressable
Lighting Interface), Lutron
EcoSystem LED, and other
drivers available, consult factory.

Advanced Optics


Snap-in frosted
acrylic lens.




Body

Aluminum extrusion
t-grid bracket.

MOUNTING

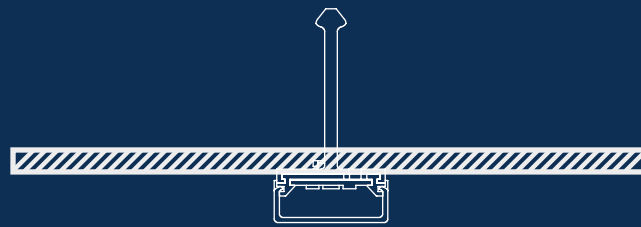

RECESSED

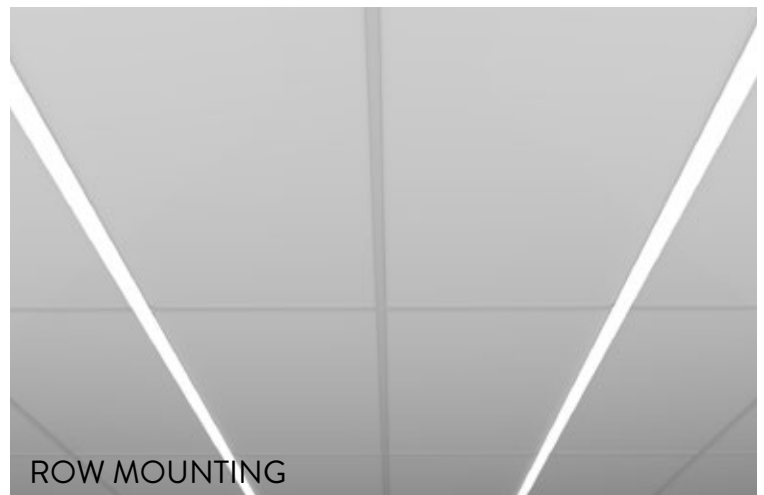


ROW MOUNTING

SEAMLESS CONTINUOUS RUNS CREATE A LINEAR LIGHTING ATMOSPHERE

It's highly engineered luminaire joining design allows for simple and intuitive assembly in the field.




PHOTOMETRIC DATA

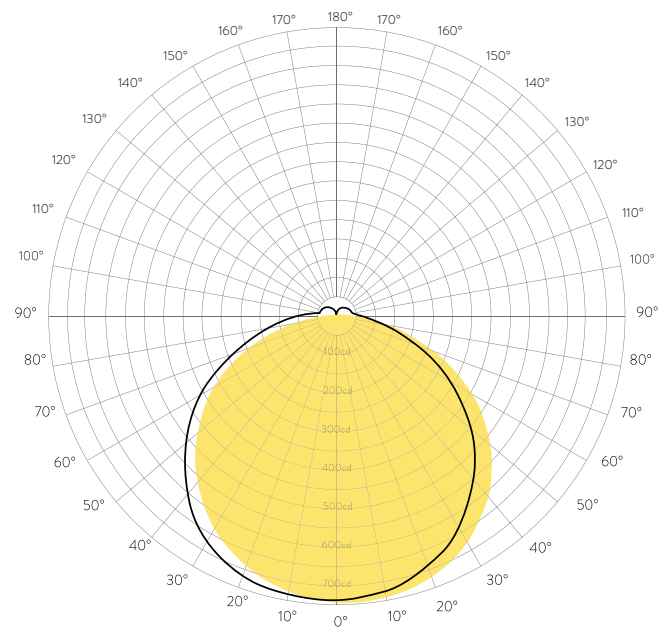

TB-4-20W-35K

0°-180° █
90°-270° █

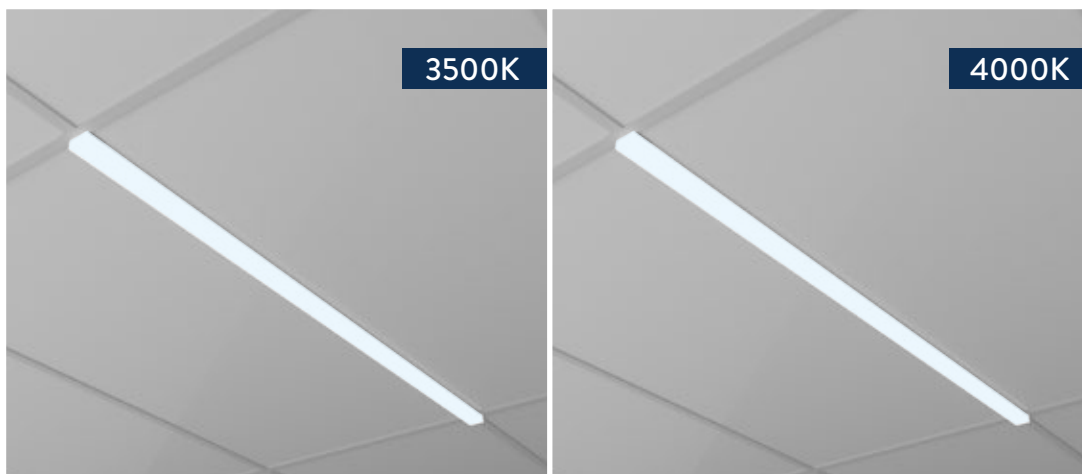

TUNABLE WHITE FUNCTION OPTIONS

Available in 3500K, and 4000K



CUSTOM CONFIGURATIONS



DIMENSIONS

STANDARD T-GRID CEILING


SIZE	L	W	H
2FT	4.00"	0.95"	0.51"
4FT	8.00"	0.95"	0.51"

SLOT GRID CEILING

SIZE	L	W	H
2FT	4.00"	0.93"	0.48"
4FT	8.00"	0.93"	0.48"

FINE LINE CEILING

SIZE	L	W	H
2FT	4.00"	0.56"	0.48"
4FT	8.00"	0.56"	0.48"

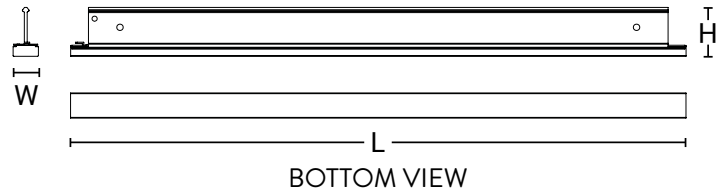

ORDERING INFORMATION

TB						MV
FIXTURE	LENGTH	WATTAGE	CCT	T-GRID SIZE	STYLE	DRIVER
TB = T-Bar	2 = 2ft	10W = 10 Watts	35K = 3500K 40K = 4000K *Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory	ST = Standard T-Grid Ceiling (15/16") SL = Slot Ceiling (9/16") FL = Fine Line Ceiling (9/16")	A = Regular B = Custom Pattern	MV = Standard 120V-277V, 10% Dimming (0-10V)
	4 = 4ft	20W = 20 Watts				

