

GENERAL DESCRIPTION

LED luminaire for **suspended** installation with aircraft cables. Features a minimalistic and clean design providing a superior quality of lighting. Snap-in flat frosted acrylic lens and extruded aluminum body. Ideal for commercial or architectural environments. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

Specifications are subject to change. Please confirm latest specifications prior to placing order.



ELECTRICAL

3000K **3500K** **4000K**

120V - 277V **347V**

*TW (Tunable White), other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory.

L80 performance at 60,000 hours minimum.

80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available, consult factory.

FINISH

Standard finish is high gloss white polyester baked powder coat enamel. Custom colours available, consult factory.

Glossy / Matte / Custom Colours



SHIELDING

Snap-in flat frosted acrylic lens.


CONSTRUCTION

4.00" diameter extruded aluminum body.

DIMENSIONS


SIZE	L	W	H
2FT	23.50"	4.00"	4.00"
4FT	46.20"	4.00"	4.00"
6FT	70.50"	4.00"	4.00"
8FT	92.20"	4.00"	4.00"

MOUNTING / CROSS SECTION

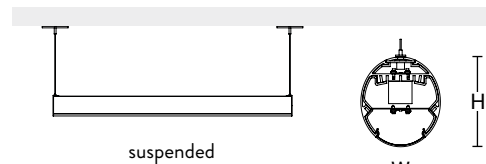


ORDERING INFORMATION

RINA				FA					
FIXTURE	DISTRIBUTION	LENGTH	LUMENS	CCT	SHIELDING	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
RINA = Round . Indirect . Direct . Architectural	5U5 = 50% Up / 50% Down	2 = 2"	50 = 500lm/ft	30K = 3000K	FA = Snap-in Flat Frosted Acrylic	GLOSSY W = White Housing	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V)
	6U4 = 60% Up / 40% Down	4 = 4"	80 = 800lm/ft	35K = 3500K		B = Black Housing	A5 = 60in Aircraft Cable	C2 = 6ft Cord	
	4U6 = 40% Up / 60% Down	6 = 6"	100 = 1000lm/ft	40K = 4000K		G = Grey Housing	A8 = 96in Aircraft Cable	C4 = 9ft Cord	EM = Emergency Driver
	7U3 = 70% Up / 30% Down	8 = 8"	120 = 1200lm/ft	TW = Tunable White		MATTE WM = White Housing	A12 = 144in Aircraft Cable	C7 = 13ft Cord	X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
	3U7 = 30% Up / 70% Down		150 = 1500lm/ft *not applicable for direct light distribution	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory		BM = Black Housing			
DIR = 100% Down					GM = Grey Housing		X = row mounting available, consult factory		
IND = 100% Up						X = other colours and finishes available, consult factory			
*Custom distribution available, consult factory									
*Batwing available, consult factory									

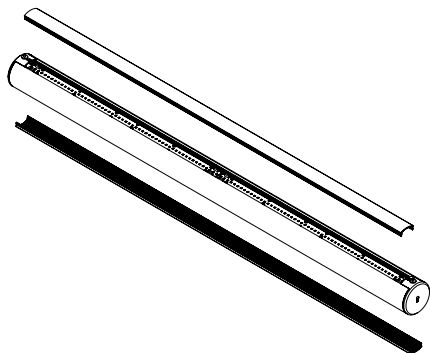

DIMENSIONS

SIZE	L	W	H	MTG L
2FT	23.50"	4.00"	4.00"	22.38"
4FT	46.20"	4.00"	4.00"	45.38"
6FT	70.50"	4.00"	4.00"	69.38"
8FT	92.20"	4.00"	4.00"	91.38"

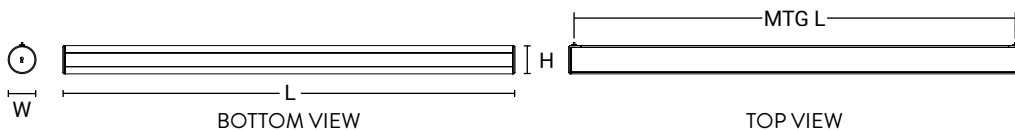

SHIELDING

Snap-in flat frosted acrylic lens.

CONSTRUCTION

4.00" diameter extruded aluminum body.

FINISH

Standard finish is high gloss white polyester baked powder coat enamel. Custom colours available, consult factory.

Glossy / Matte / Custom Colours



LED LIGHT ENGINE

Mounted on internal high reflectance white painted reflector.

LED DRIVER

1% Dimming (0-10V). Emergency driver available.
DALI (Digital Addressable Lighting Interface), Lutron EcoSystem LED, and other drivers available, consult factory.

ELECTRICAL

3000K 3500K 4000K

120V - 277V 347V

*TW (Tunable White), other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory.
L80 performance at 60,000 hours minimum.
80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**
Suitable for damp locations.




*LED Five (5) year limited warranty.


**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

MOUNTING / CROSS SECTION

Suspended installation with aircraft cables.

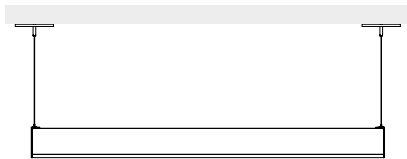

SUSPENDED



CROSS SECTION