

# AHMM



**PEERLESS**  
electric-électrique

INCEPTION  
PEERLESS CANADA

# CONCEPT

LED luminaire for surface or suspended installation with aircraft cables. Wide acrylic lens, ribbed on the inside with a rigid one-piece body constructed from code gauge steel. Ideal for commercial environments. Row mounting available, consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*

Suitable for damp locations.



\*LED Five (5) year limited warranty.

\*\*Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.




## STRUCTURE


**Body**  
Rigid one-piece body  
constructed from  
code gauge steel.  
Optional safety pin available.

**Advanced Optics**  
Wide acrylic lens,  
ribbed on the inside.

**LED Driver**  
1% Dimming (0-10V).  
Emergency driver available.  
DALI (Digital Addressable  
Lighting Interface), Lutron  
EcoSystem LED, and other  
drivers available, consult factory.

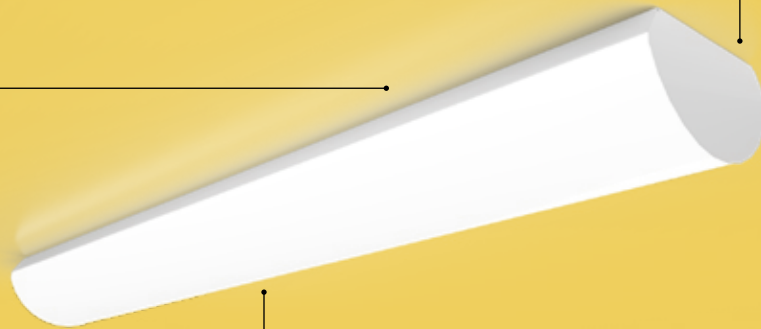


## MOUNTING

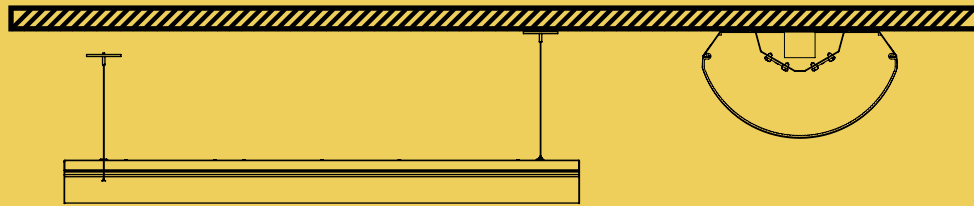

**SUSPENDED**  
(aircraft cables)

**SURFACE**

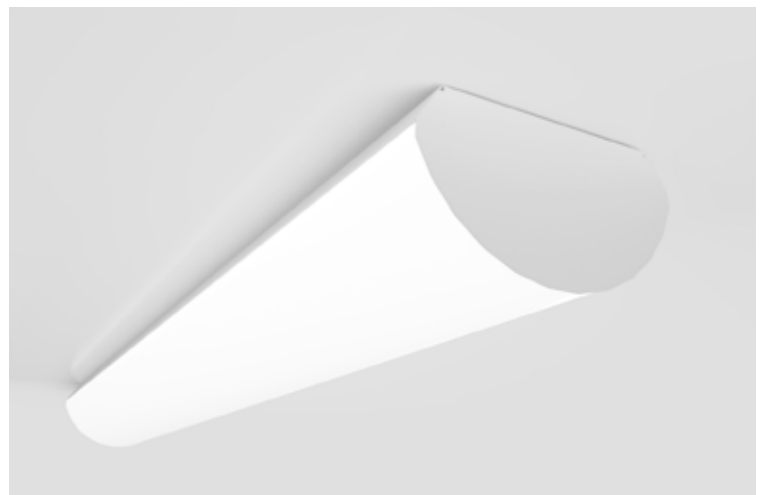




## HALF MOON DESIGN

Elegantly designed after the half moon phase, the AHM profile gives a added charm to any space. Using advanced LED engines, it provides wide spread downlight, delivering both efficient and comfortable illumination.




## PHOTOMETRIC DATA

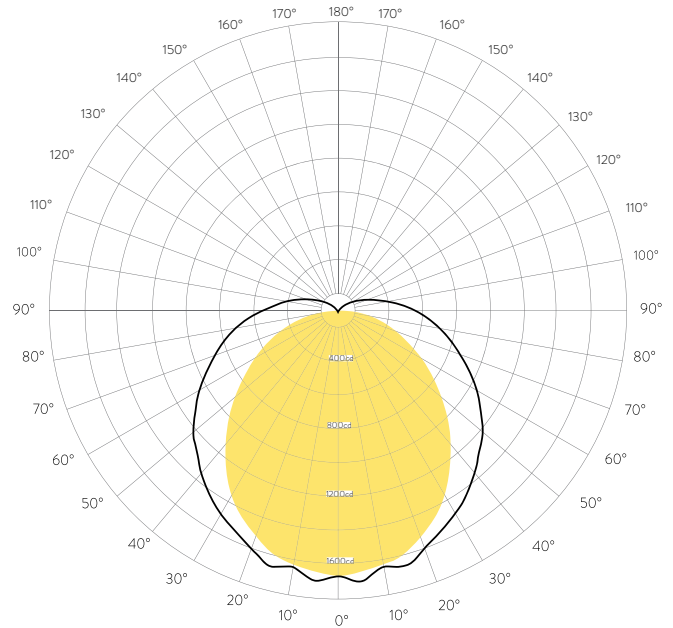

AHM-WA-4-60-40K

0°-180° █  
90°-270° █

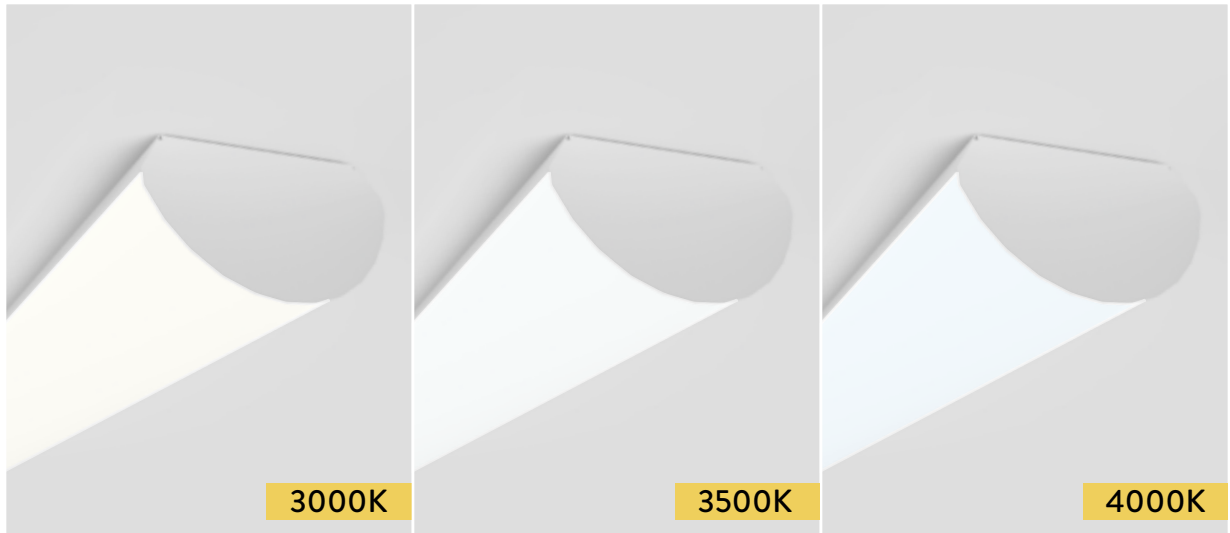


## TUNABLE WHITE FUNCTION OPTIONS

Available in 3000K, 3500K, and 4000K




## COLOR

Standard finish is matte white polyester baked powder coat enamel. Matte grey and black available.

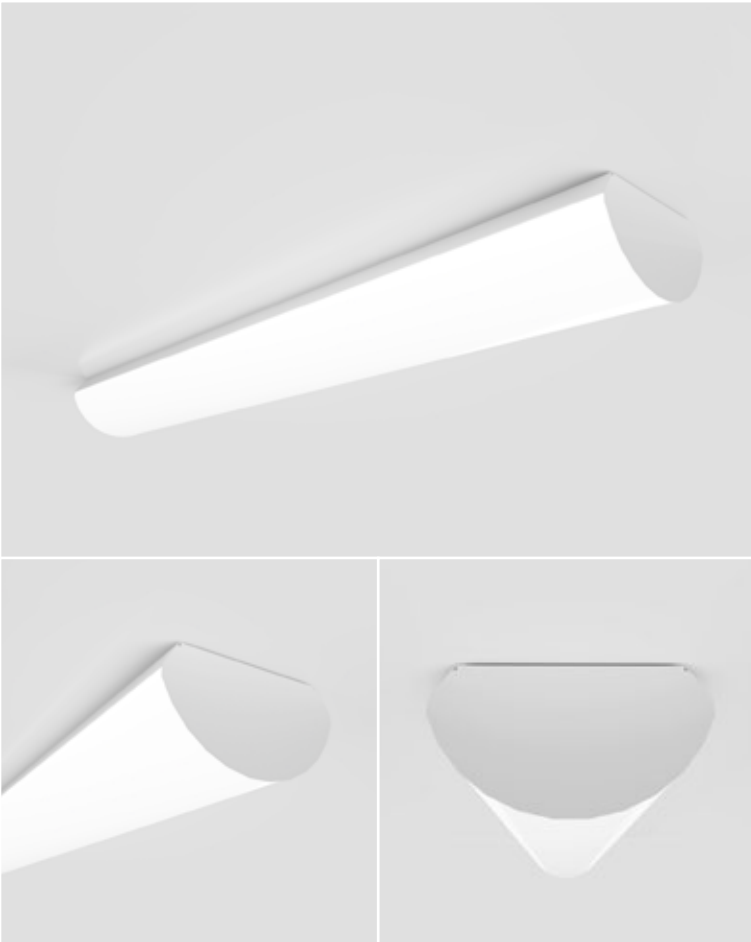

## DIMENSIONS

SIZE	L	W	H
2FT	23.00"	7.50"	4.10"
4FT	46.00"	7.50"	4.10"

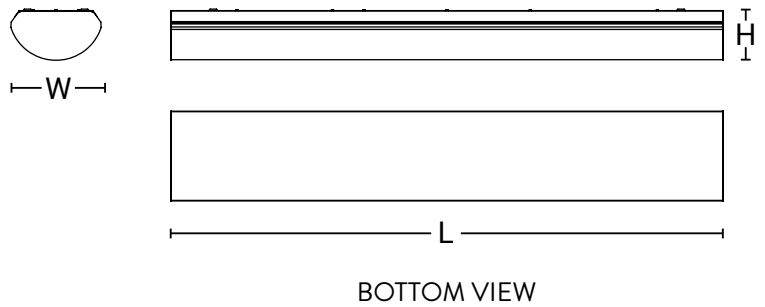

## ORDERING INFORMATION

AHM	WA								
FIXTURE	SHIELDING	LENGTH	LUMENS	CCT	FINISH	*OPTION*	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
<b>AHM</b> = Architerctual . Half . Moon	<b>WA</b> = Wide Acrylic Lens	2 = 2ft	15 = 1500lm 30 = 3000lm 40 = 4000lm	30K = 3000K 35K = 3500K 40K = 4000K  TW = Tunable White  *Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory	<b>MATTE</b>  WM = White Housing  BM = Black Housing  GM = Grey Housing	<b>SP</b> = Safety Pin (Tamper Resistant Thumb Screws)	<b>A4</b> = 48in Aircraft Cable	<b>C1</b> = 5ft Cord	<b>MV</b> = Standard 120V-277V, 1% Dimming (0-10V)  <b>347</b> = Standard 347V Dimming (0-10V)  <b>EM</b> = Emergency Driver  <b>X</b> = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		4 = 4ft	30 = 3000lm 60 = 6000lm 80 = 8000lm	<b>A5</b> = 60in Aircraft Cable  <b>A8</b> = 96in Aircraft Cable  <b>A12</b> = 144in Aircraft Cable	<b>C2</b> = 6ft Cord  <b>C4</b> = 9ft Cord  <b>C7</b> = 13ft Cord				

