

WRE



PEERLESS[®]
electric-électrique

INCE|P|T|O|N[®]

PEERLESS CANADA

CONCEPT

The WRE is a LED luminaire for suspended installation. Snap-in frosted acrylic lens with a rigid one-piece body constructed from code gauge steel. Decorative plastic end caps. Adjustable power, emergency and sensor available. Ideal for commercial environments (closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, and more decorative applications).

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.




*LED Five (5) year limited warranty.


**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.

STRUCTURE

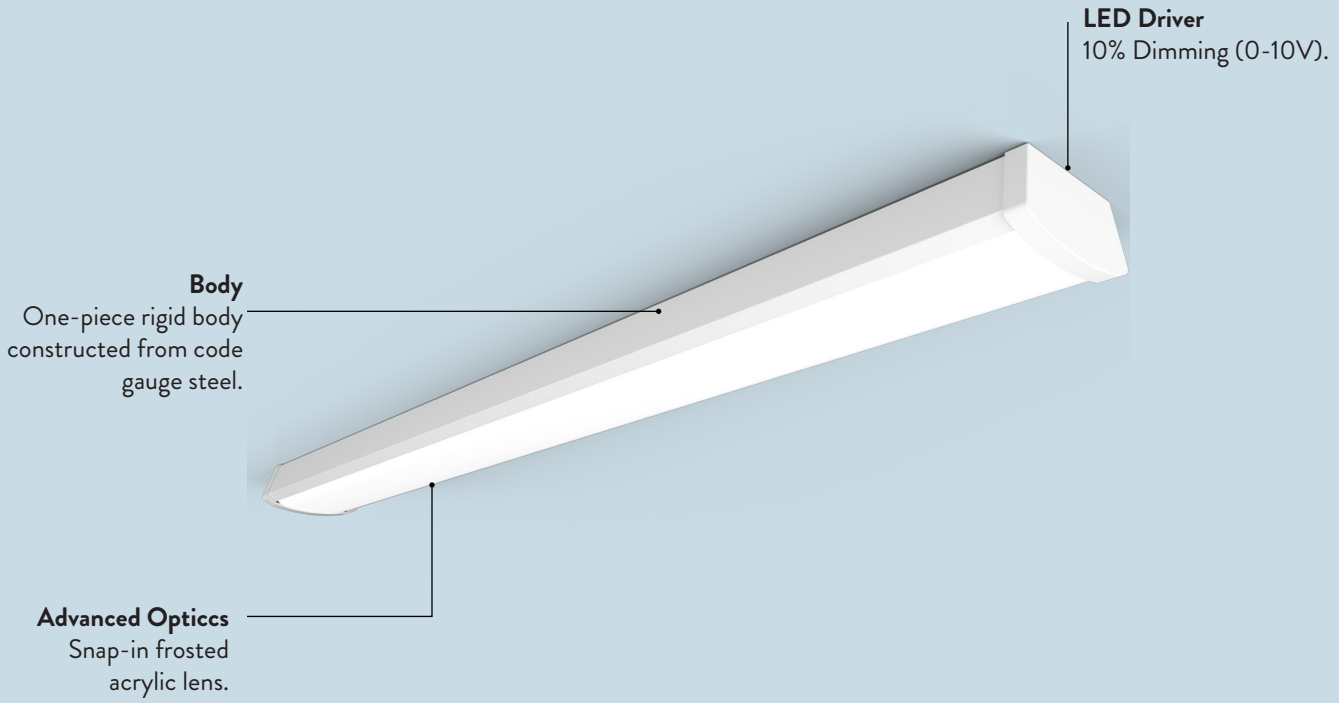


MOUNTING




SUSPENDED



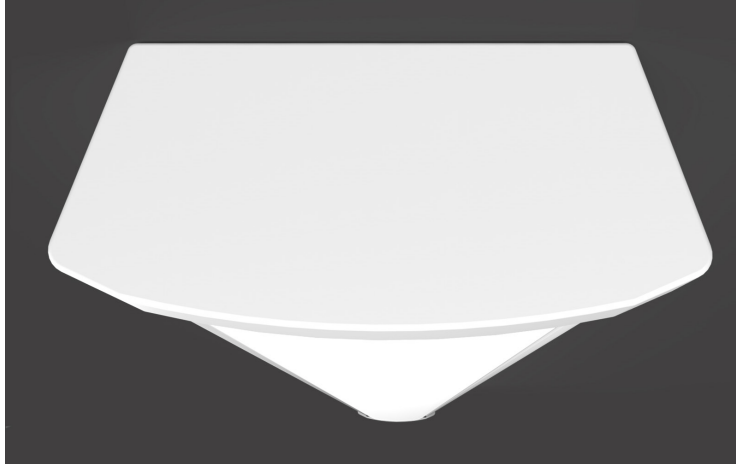


PHOTOMETRIC DATA

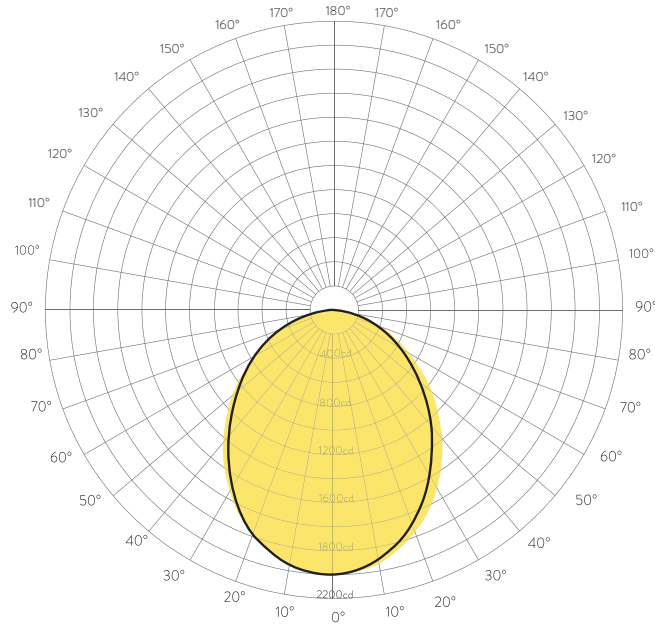


WRE-4-40W-40K

0°-180° 
90°-270° 

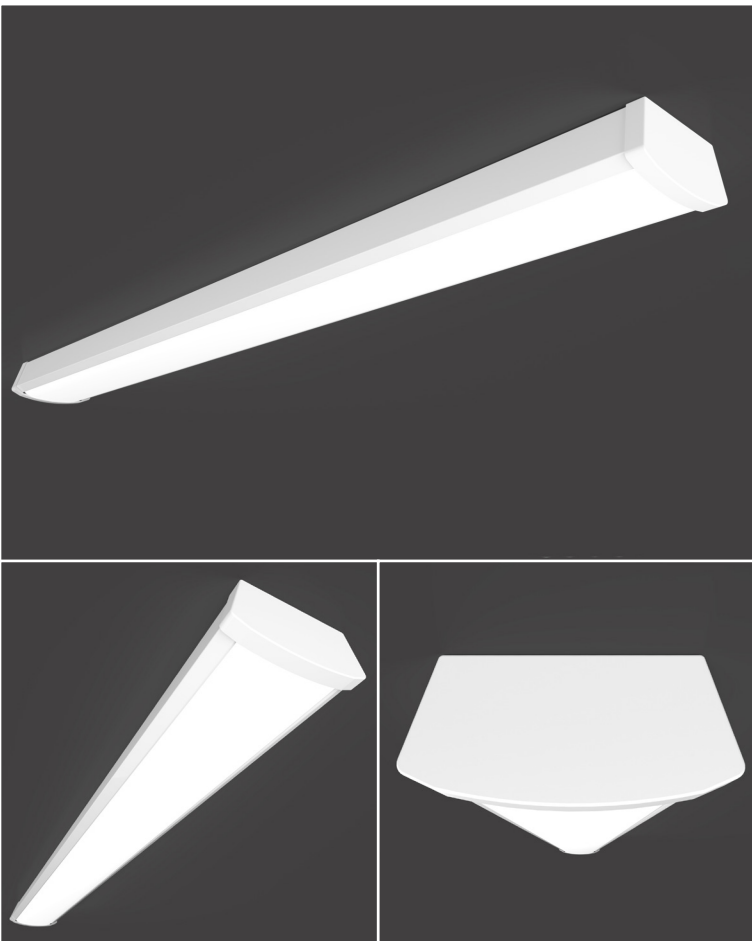

DIMENSIONS

SIZE	L	W	H
2FT	23.70"	5.30"	2.05"
4FT	47.30"	5.30"	2.05"
8FT	94.40"	5.30"	2.05"

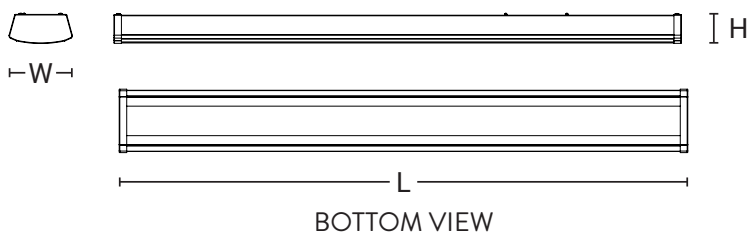

ORDERING INFORMATION

WRE	LENGTH	WATTAGE SELECTABLE	CCT SELECTABLE	DRIVER	
WRE = WR. Evalux	2 = 2 ft	10W = 10 Watts	30K = 3000K 35K = 3500K 40K = 4000K	MV= Standard 120V-277V, 10% Dimming (0-10V)	
		15W = 15 Watts			
		20W = 20 Watts			
	4 = 4 ft	30W = 30 Watts			MV3 = Standard 120V-347V, 10% Dimming (0-10V)
		40W = 40 Watts			
		50W = 50 Watts			
	8 = 8 ft	60W = 60 Watts			
		70W = 70 Watts			
		80W = 80 Watts			

